



Europäisches
Patentamt

European
Patent Office

Office européen
des brevets

REC'D 12 AUG 2003

WIPO

PCT

Bescheinigung

Certificate

Attestation

Die angehefteten Unterla-
gen stimmen mit der
ursprünglich eingereichten
Fassung der auf dem näch-
sten Blatt bezeichneten
europäischen Patentanmel-
dung überein.

The attached documents
are exact copies of the
European patent application
described on the following
page, as originally filed.

Les documents fixés à
cette attestation sont
conformes à la version
initialement déposée de
la demande de brevet
européen spécifiée à la
page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

02017217.7

PRIORITY DOCUMENT
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH
RULE 17.1(a) OR (b)

Der Präsident des Europäischen Patentamts;
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets
p.o.

R C van Dijk

BEST AVAILABLE COPY



Anmeldung Nr:
Application no.: 02017217.7
Demande no:

Anmeldetag:
Date of filing: 31.07.02
Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

DEUTSCHE THOMSON-BRANDT GMBH
Hermann-Schwer-Strasse 3
78048 Villingen-Schwenningen
ALLEMAGNE

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:
(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.
If no title is shown please refer to the description.
Si aucun titre n'est indiqué se référer à la description.)

Method and device for performing communication on a bus structured network

In Anspruch genommene Priorität(en) / Priority(ies) claimed /Priorité(s)
revendiquée(s)
Staat/Tag/Aktenzeichen/State/Date/File no./Pays/Date/Numéro de dépôt:

Internationale Patentklassifikation/International Patent Classification/
Classification internationale des brevets:

H04L29/00

Am Anmeldetag benannte Vertragsstaaten/Contracting states designated at date of
filing/Etats contractants désignées lors du dépôt:

AT BE BG CH CY CZ DE DK EE ES FI FR GB GR IE IT LI LU MC NL PT SE SK TR

PD020075*Th*300702
ID010118

30.07.2002

**Method and device for performing communication on a bus
structured network**

- The invention refers to a method and a device for
- 5 performing communication on a bus structured network
within which data transfer between different devices may
happen in a unidirectional or isochronous manner and in a
bi-directional or asynchronous manner.
- 10 WO 98/47271 describes a protocol processor for
manipulating a stream of data supporting both,
isochronous and asynchronous format data transfer. In a
certain embodiment, an isochronous data pipe is used to
act as virtual asynchronous data pipe, transmitting all
- 15 asynchronous data to be transferred.

- Data, which are transferred in an isochronous manner
reach a target device at a predetermined time while data,
which are transferred in an asynchronous manner do not
- 20 necessarily reach a device at a predetermined time. If
data, which is transferred in an isochronous manner does
not reach its target device it is not resent in order not
to delay following isochronous data. Data, which is
transferred in an asynchronous manner is checked for its
- 25 reception by the target device. If such data does not
reach its target device it is resent until it is assured
that it has reached its target device. Usually control
commands are sent in an asynchronous manner in order to
assure that the control command has reached its target
- 30 device.

Control commands having different target devices are sent
as different items, one for each target device. Control
commands thus do not reach their respective target

PD020075*Th*300702

- 2 -

devices at the same time. This is regarded to be disadvantages in case that undesired effects occur when said control commands do not reach their target devices at the same time.

5

It is an object of the invention to reduce these undesired effects.

According to the invention a method for performing communication on a bus structured network between master device and slave devices, which uses a bi-directional data stream for secure communication and a unidirectional data stream for real time communication lies in the fact that the unidirectional data stream is used for a certain type of secure communication between a master device and at least one slave device. This makes possible to provide certain types of secure information in real time to several slave devices. Advantageously, the unidirectional data stream is an isochronous data stream and the bi-directional data stream is an asynchronous one.

One advantageous type of secure communication information being transmitted via a unidirectional data stream is control commands. The inventive method is especially advantageous for control commands that control functionalities, which have an effect where non-timely execution is directly recognizable by a user. Such control commands are for example control of loudness of different loudspeakers, especially in a surround sound system, control of visual parameters as brightness, colour etc. in a multi-display video system, where two or more displays are used together to get an enlarged picture such as video wall, stereoscopic display, surround display etc.

PD020075*Th*300702

- 3 -

Preferably, the certain type of secure communication, which is sent as unidirectional data stream, is repeatedly sent. This has the advantage that it increases the security, which is reduced when using the unidirectional data stream. For example, control commands are sent repeatedly to increase the chance that all slave devices concerned receive the control command even if some commands sent are not received due to noise or other disturbances or negative influences on the network. In this case, timely execution may not be reached, however, as it happens only in the rare case of disturbance, the negative recognizable effect to the user is less than using state of the art methods. Preferably, the number of repetitions is limited to a certain number, e.g. ten times repeated sending of the command, or a certain time, for example repeated sending until up to one second after the first item was sent.

Advantageously, the disturbance on the communication network is detected, the degree of disturbance is determined and, in case that the degree of disturbance exceeds a certain level, the use of unidirectional data stream for secure communication is reduced. This has the advantage that in case of strong disturbance, where a relatively high percentage of data is not received correctly, secure communication via unidirectional data stream is reduced in order to reduce negative influences caused by disturbance. This reduction is for example that secure communication via unidirectional data stream is sent to only a reduced number of devices, or for a reduced set of types of secure communication, or, secure communication via unidirectional data stream is completely stopped. The respective communication is preferably replaced by communication via bi-directional

PD020075*Th*300702

- 4 -

data streams to make sure correct reception for example of control commands. Detection of disturbance and its degree is for example reached by evaluating how many bi-directionally sent data are not received correctly. For example the number of not acknowledged receptions or the number of resent requests is compared to the total number of data sent. Also a device specific evaluation is proposed.

10 In case that a slave device needs to send secure communication information to several other devices, it is proposed that this slave device sends this information as secure information via the bi-directional data stream to a master device, which then transmits said information as
15 certain type of secure communication via unidirectional data stream to the other devices. Depending on the configuration of the network and the actual task, a device may act as a master device in one situation and act as slave device under other circumstances. Slave
20 devices, which according to certain types of bus structured networks or under certain circumstances are not permitted to issue unidirectional data streams, have now possibility to issue indirectly secure information to several other devices, which is received there at the
25 same time. For example, the change of loudness might be requested by a user making use of a user interface being attached to or being itself a slave device of the network. This request is transmitted from the slave device to the master device, which itself issues a
30 respective command via unidirectional data stream. An alternative solution is to permit slave devices to issue certain types of secure communication via unidirectional data streams. This has the advantage of increased

PD020075*Th*300702

- 5 -

responsiveness, might however not be able to be implemented in currently existing bus structures.

A slave device performs, according to the invention,
5 scanning and decoding of both, bi-directional data streams and unidirectional data streams, which it receives from the bus, in order to retrieve secure communication information. That means that also the unidirectional data streams are scanned to detect data
10 belonging to a certain type of secure communication.

According to the invention, a master device performs issuing of secure information to several slave devices using a unidirectional data stream in case of certain
15 predefined types of secure communication information.

Preferably, a network, a slave device or a master device are provided with means to perform the methods according to the invention.

20

A more detailed description of embodiments of the invention will also give information of additional inventive features and advantages of the invention. However, the invention is not restricted to the
25 embodiments described but also includes deviations therefrom, lying in the ability of a skilled person. In the figures

Fig. 1 shows a serial bus protocol,
30 Fig. 2 shows a network for performing the inventive method,
Fig. 3 shows the structure of a usual isochronous data item,

PD020075*Th*300702

- 6 -

- Fig. 4 shows the structure of an inventive isochronous data item,
- Fig. 5 shows an embodiment where the inventive method is used, and
- 5 Fig. 6 shows another embodiment where the inventive method is used.

An example of a bus-structured network to which the invention refers is the IEEE 1394 bus. The IEEE 1394-1995
10 standard is an international standard for implementing an inexpensive high-speed serial bus architecture which supports both asynchronous and isochronous format data transfers. Isochronous data transfers are real-time transfers which take place such that the time intervals
15 between significant instances have the same duration at both the transmitting and receiving applications. Each packet of data transferred isochronously is transferred in its own time period. An example of an ideal application for the transfer of data isochronously would
20 be from a video recorder to a television set. The video recorder records images and sounds and saves the data in discrete chunks or packets. The video recorder then transfers each packet, representing the image and sound recorded over a limited time period, during that time
25 period, for display by the television set. The IEEE 1394 standard bus architecture provides multiple channels for isochronous data transfer between applications. A six bit channel number is broadcast with the data to ensure reception by the appropriate application. This allows
30 multiple applications to simultaneously transmit isochronous data across the bus structure. Asynchronous transfers are traditional data transfer operations which take place as soon as possible and transfer an amount of data from a source to a destination. The IEEE 1394

PD020075*Th*300702

- 7 -

standard provides a high-speed serial bus for interconnecting digital devices thereby providing a universal I/O connection. The IEEE 1394 standard defines a digital interface for the applications thereby
5 eliminating the need-for an application to convert digital data to analog data before it is transmitted across the bus. Correspondingly, a receiving application will receive digital data from the bus, not analog data, and will therefore not be required to convert analog data
10 to digital data. The cable required by the IEEE 1394 standard is very thin in size compared to other bulkier cables used to connect such devices. Devices can be added and removed from an IEEE 1394 bus while the bus is active. If a device is so added or removed the bus will
15 then automatically reconfigure itself for transmitting data between the then existing nodes. A node is considered a logical entity with a unique address on the bus structure. Each node provides an identification ROM, a standardized set of control registers and its own
20 address space.

The IEEE 1394 standard defines a protocol as illustrated in Figure 1. This protocol includes a serial bus management block 10 coupled to a transaction layer 12, a
25 link layer 14 and a physical layer 16. The physical layer 16 provides the electrical and mechanical connection between a device or application and the IEEE 1394 cable. The physical layer 16 also provides arbitration to ensure that all devices coupled to the IEEE 1394 bus have access
30 to the bus as well as actual data transmission and reception. The link layer 14 provides data packet delivery service for both asynchronous and isochronous data packet transport. This supports both asynchronous data transport, using an acknowledgement protocol, and

PD020075*Th*300702

- 8 -

isochronous data transport, providing real-time guaranteed bandwidth protocol for just-in-time data delivery. The transaction layer 12 supports the commands necessary to complete asynchronous data transfers, including read, write and lock. The serial bus management block 10 contains an isochronous resource manager for managing isochronous data transfers. The serial bus management block 10 also provides overall configuration control of the serial bus in the form of optimizing arbitration timing, guarantee of adequate electrical power for all devices on the bus, assignment of the cycle master, assignment of isochronous channel and bandwidth resources and basic notification of errors.

Figure 1 illustrates a protocol defined by the IEEE 1394 standard. An isochronous data pipe transmits and receives data for an application across a bus structure. Preferably, the bus structure is an IEEE 1394 standard bus structure. The isochronous data pipe is programmable and will execute a series of instructions on a stream of data in order to perform manipulations on the data required by the application. In a link circuit, an isochronous data pipe is included for transmitting and receiving isochronous data and an asynchronous data pipe is included for transmitting and receiving asynchronous data. The data from the isochronous data pipe and the asynchronous data pipe is multiplexed onto the bus structure. The data received from the bus structure is demultiplexed to the isochronous data pipe and the asynchronous data pipe. Alternatively, the isochronous data pipe is programmed to transmit and receive both isochronous and asynchronous data.

Fig. 2 shows diagrammatically a network for performing the inventive method. Several audio visual devices AV1,

PD020075*Th*300702

- 9 -

AV2, such as television display, video recorder, DVD player etc. are connected to loudspeakers LS1 to LS3 and a personal computer PC. In this embodiment audio visual device AV1 is configured as master device while the other devices AV2, LS1 to LS3, PC are slave devices. Each device conforms to a node of the network and is connected via a cable 15 to at least one other device of the network. Some of the devices as personal computer PC, loudspeaker LS1 and audiovisual device AV2 are directly connected to the master device audio visual device AV1. Other devices are indirectly connected to the master device as loudspeaker LS2, which is connected to audio visual device AV1 via audio devisal device AV2 or loudspeaker LS3, which is connected directly to loudspeaker LS2 and via this indirectly to audio visual device AV1. Connector 17 indicates diagrammatically that devices may be disconnected from or connected to the network. Cables 15 are provided to transport an isochronous data stream DSA as well as an asynchronous data stream DSA, which itself consist of data packets DPIi, DPAi. In the embodiment, audio visual device AV2 might be a source of video, transmitting an isochronous video stream DSIvid to a display, here Audio visual device AV2, and an isochronous audio stream DSI and to the loudspeaker LS1...LS3.

Usually the volume of loudspeakers LS1...LS3 in an IEEE 1394 network is controlled with asynchronous data packets DPAi, whereby a data packet DPAi must be sent to each loudspeaker LS1...LS3 separately. Within the isochronous stream DSI the volume control information CIV automatically reaches all loudspeakers LS1...LS3 receiving the selected isochronous stream DSI. The volume

PD020075*TA*300702

- 10 -

control information CIV reaches all loudspeaker LS1...LS3 at the same time.

In an IEEE 1394 network all connected devices AV1, AV2,
5 LS1...LS3, PC may receive data either as stream DSA of asynchronous packet DPA or as isochronous stream DSI. An asynchronous packet DPA is addressed to one or all nodes, i.e. to all devices. It is not possible to send one asynchronous packet DPA to selected nodes. An
10 asynchronous packet DPA will be acknowledged by the receiving node if received and executed correctly. If the asynchronous packet DPA was not received correctly the transmitting node may retry sending the packet after 100ms delay up to 15 times or more. The delay between
15 transmission and confirmation of an asynchronous packet DPA may be up to 15*100ms. There is no warranty at which point of time the packet DPA will be sent over the bus. An isochronous stream DSI is used to transmit real time data with high bandwidth to several nodes who are able to
20 receive the data stream DSI. The isochronous stream DSI has the warranty to be transmitted immediately. The usual way to control the volume of several digital loudspeakers LS1...LS3 is to send an asynchronous packet DPA separately to every digital loudspeaker. Here, three
25 packets DPA would be needed. It is not predictable at which time the volume control information CIV contained in the packets DPA reaches the different digital loudspeakers LS1...LS2. If the volume control information CIV is sent in an isochronous stream DSI the volume
30 control information CIV will be received by all digital loudspeakers L1...L3 at the same time. The volume control information CIV will be sent in the same isochronous stream DSI and as the digital audio data. The volume control information CIV may be sent repeatedly without

PD020075*Th*300702

- 11 -

any further expense. In this case the volume control information is not just "volume up" or "volume down" but a more precise command like "set volume to 20% of max volume" or something similar.

5

An advantage of the invention is that the volume control information CIV reaches automatically all nodes LS1...LS3, which receive the isochronous stream DSI and the volume control can be executed at the same time in
10 all participating digital loudspeakers LS1...LS3. If the volume is controlled with asynchronous packets DPA there may be an execution difference of several milliseconds up to 1.5 seconds in worst case between the different digital loudspeakers LS1...LS3, which time difference
15 would be recognizable.

The volume control information CIV, which is transmitted in isochronous streams DSI is transmitted by the node which sends the isochronous stream DSI, here audio visual
20 device AV2, whereas volume control information in asynchronous packets DPA may be sent by every node. It is, therefore, proposed that the node that needs to send volume control information transmits it first as asynchronous packet DPA to the node, which sends the
25 isochronous stream DSI for including the control information into the isochronous stream DSI.

Fig. 3 shows the structure of a usual isochronous data packet DPI. It consists of an ISO header 21, a CIP header
30 22 and payload 23, which consists in case of 48 kHz sampling rate of 16 quadlet data, each quadlet having 32 bits.

PD020075*Th*300702

- 12 -

Fig. 4 shows the structure of an isochronous data packet DPI used for certain type of secure communication, like volume control information CIV. It comprises the ISO header 21 and the CIP header 22 but no payload area 23.

5 Inside the CIP header 22 there is a command area 24 for providing a certain type of secure communication, in the example described above the volume control information CIV. When any node receives the isochronous data packet DPI as shown, it checks within the CIP header 22 whether
10 the command area 24 contains a command, whether this command is to be performed by it and performs it accordingly. A loudspeaker LSi would check for a volume control information CIV and perform it accordingly, while it would not recognize control information related to
15 video display.

Fig. 5 shows an embodiment of the invention, in which six display devices D_{ij} with $i,j=1,2,3$ forming a large video display wall. All display devices D_{ij} are connected via
20 cables 15 directly or indirectly to audio visual device AV1. In case of a change of brightness control signal CIB is to be issued, this will be done using the isochronous data stream DSI according to the invention. This makes possible that all displays D_{ij} change brightness in the
25 same way at the same time thus reducing any negative visual effect for a user.

Fig. 6 shows another embodiment where the invention is used. Display devices DS1 to DS4 are arranged surrounding
30 a center point 1. Close to display devices DS1 to DS4 there are arranged loudspeakers LSi1, LSi2 with $i=1-4$ above and below display device DSi, respectively, and loudspeakers LS0 and LS5 at the side. This arrangement makes possible surround video and audio reception giving

PD020075*Th*300702

- 13 -

a user located at or near center point 1 the impression of close to complete surround feeling. Also in this case the display devices DSI and the loudspeakers LSi are connected via a network to a master device (not shown here). In case of change of loudness or brightness or any other audio or video characteristic, this will be transmitted according to the invention via the isochronous data stream DSI thus reducing or completely preventing any negative influence on the user. Would the related control information CIV not be transmitted in the isochronous data stream DSI, negative effects as balance or fading etc. would occur and the user would get a wrong impression about his or her position in the three dimensional space. Audio information received by the user would not completely coincide with visual information thus causing irritation.

In other words the invention solves the problem that in an IEEE 1394 network the volume control for loudspeakers LSi is sent to the loudspeakers LSi via asynchronous packets DPA. As these packets DPA need to be addressed to each single device, i.e. to each loudspeaker LSi separately, and as these packets DPA are transmitted with lower priority, i.e. not necessarily in real-time, the volume control command CIV might need up to 1.5 seconds before it is performed. This is a disadvantage. The long time is caused by the fact that the receipt of asynchronous packets is checked, and, if necessary, a non-received asynchronous packet DPA is resent. A further disadvantage is that different loudspeakers LSi will perform a change in volume at different times thus leading to an undesired sound impression to the user. According to the invention it is proposed to use the isochronous stream DSI, which is used to transport the

PD020075*Th*300702

- 14 -

real-time data, as video or audio data, to also transmit the volume control signal CIV. The isochronous stream DSI is transmitted in real-time, however, there is no feedback whether it is correctly received. Therefor the volume control signal CIV is transmitted repeatedly, thus compensating for loss of a single command. Volume control signals CIV are thus received at the same time at all loudspeakers LSi in the system thus volume is changed synchronously for all loudspeakers LSi.

PD020075*Th*300702

- 15 -

Patent Claims

1. Method for performing communication on a bus
structured network between master device (AV1) and
5 slave devices (AV2, PC, LSij, DSij) using a bi-
directional data stream (DSA) for secure
communication and a unidirectional data stream (DSI)
for real-time communication, characterized in that
the unidirectional data stream (DSI) is used for a
10 certain type of secure communication (CIV, CIB)
between a master device (AV1) and at least one slave
device (AV2, PC, LSij, DSij).
2. Method according to claim 1, characterized in that
15 said certain type of secure communication (CIV, CIB)
is a control command (CIV, CIB).
3. Method according to claim 1 or 2, characterized in
that said certain type of secure communication (CIV,
20 CIB) is sent in a repeated manner.
4. Method according to one of claims 1-3, characterized
in that disturbance on the communication network is
detected, its degree is determined, and, depending on
25 said degree of disturbance, the use of unidirectional
data stream for secure communication is reduced.
5. Method according to one of claims 1-4, characterized
in that secure communication information (CIV, CIB)
30 which is to be issued by a slave device (AV2, PC,
LSij, DSij) to several other devices (AV1, AV2, PC,
LSij, DSij) is issued as secure communication
information (DSA) to a master device (AV1) only,
which transmits it as said certain type of secure

PD020075*Th*300702 - 16 -

communication information (CIV, CIB) via
unidirectional data stream (DSI) to the other devices
(AV2, PC, LSi_j, DSi_j).

- 5 6. Method for a slave device for performing
communication according to one of claims 1-5,
characterized in that the slave device (AV2, PC,
LSi_j, DSi_j), for retrieving said certain type of
secure communication information (CIV, CIB), scans
10 and decodes both, bidirectional data streams (DSA)
and unidirectional data streams (DSI) received from
said bus.
7. Method for a master device for performing
15 communication according to one of claims 1-5,
characterized in that the master device (AV1) sends
certain type of secure information (CIV, CIB) to
several slave devices (AV2, PC, DSi_j, LSi_j) on said
bus using a unidirectional data stream (DSI).
- 20 8. Network, slave device or master device for performing
the method according to one of claims 1-5, 1-6, or 1-
5 and 7, respectively.

25

PD020075*Th+300702

- 17 -

Abstract

Method and device for performing communication on a bus structured network

5

The invention refers to a method for performing communication on a bus structured network between master device AV1 and slave devices AV2, PC, LSij, DSij using a bi-directional data stream DSA for secure communication and a unidirectional data stream DSI for real-time communication.

According to the invention the unidirectional data stream DSI is used for a certain type of secure communication CIV, CIB between a master device AV1 and at least one slave device AV2, PC, LSij, DSij.

Fig. 2

1/1

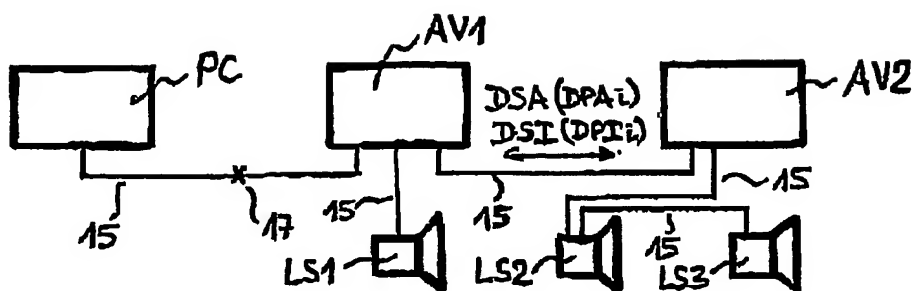


Fig. 2

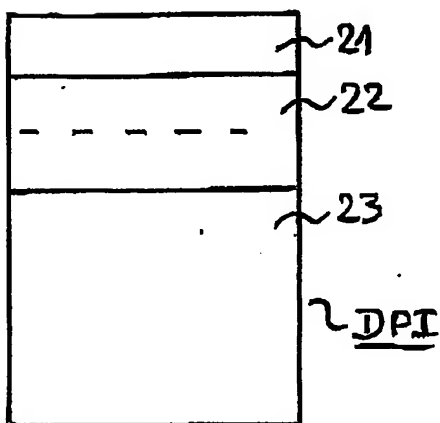


Fig. 3

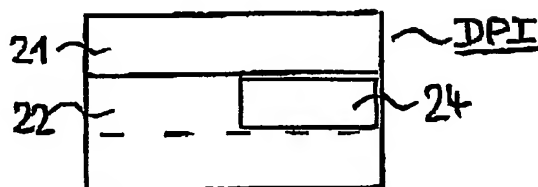


Fig. 4

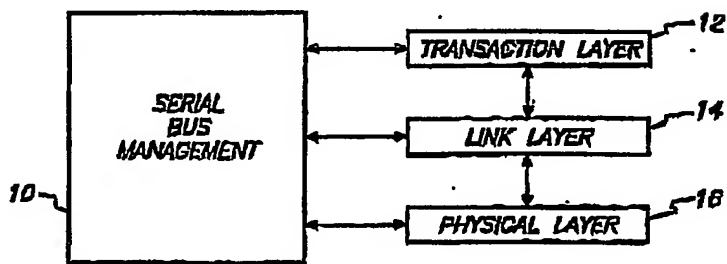


FIG. 1

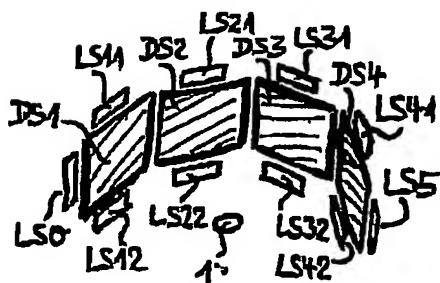


Fig. 6

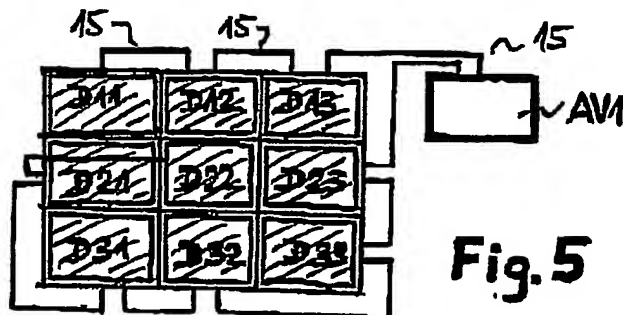


Fig. 5